




PLATINA WEATHERCOAT LONG LIFE 15

Ultra High Performance Luxury Exterior Emulsion



Colour Range



Over 2,000 shades

Finish



High Sheen

Toxicity



Fire Hazard Class

Non- flammable
Unusual Fire & Explosion Hazards
Material can splatter above 212°F.
Polymer film can burn.



Pot Life of Thinned Material
Within 24 hrs.

Warranty *




Product Description

Weathercoat Longlife 15 is the finest quality product in the premium exterior range with unique engineering that provides ultra-high performance in terms of durability, anti-fungal and anti-algal protection, colour retention etc. It is also meticulously designed with extraordinary grade of elastomeric inorganic organic hybrid acrylic polymer enriched with nanotechnology and polyurethane chemistry. The highly optimised formulation provides outstanding mechanical properties along with extended service life even under challenging climatic conditions. It contains special grades of light fast pigments and special additives to meet long-term performance. It comes with a 15 year performance warranty.

Recommended Use

Exterior plastered surfaces, concrete blocks and asbestos

Colour Range



Over 2,000 shades

Finish

- GLOSS
- HIGH SHEEN ✓
- SHEEN
- MATT

High Sheen

Toxicity



Coverage

60 -70 sq.ft/ lt/2 coats, under ideal test conditions.
(Coverage may depend on factors like surface conditions, surface preparation, application skill, weather conditions, dilution etc.)

Recommended Undercoats


- Primer:** For wall/plastered surfaces – Home shield PU Roofcoat
- Putty:** For wall/plastered surfaces – Bison Wall Putty

Drying Time




SD: 30 min depending on weather conditions
HD: 4-6 hours

Dilution Ratio




40% by volume
For dark shades: 0-10%

Application Method

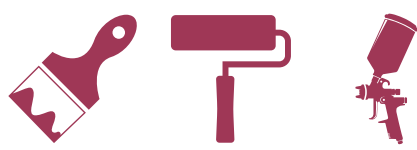

Brush/ Roller/ Spray

Gloss Level



18-22 at 60° GH when released



PLATINA WEATHERCOAT
LONG LIFE 15
 Ultra High Performance Luxury Exterior Emulsion



Packs



20 Ltr

ColorBank/ Non-ColorBank – Pack

Health & Safety

If the paint comes in contact with eyes or skin, flush with a large amount of water for at least 15 minutes. See a physician, if irritation persists. Wash affected skin areas with soap and water.

Surface Preparation



For fresh/new surfaces: The surface should be allowed to cure properly.



Apply 1 coat of Illusion Sealer to avoid the problem of salt petering.

For Previously Painted Surfaces:



Strip all the old paint and remove all the loose dust, grease, fungus and algae by sanding or wire brushing.



Cracks, holes, dents and damp areas should be repaired properly before painting.



Treat the surface with Bio-wash solution and wash it next day with potable water. Leave the surface to dry thoroughly.

Priming: For best result apply Home shield PU Roofcoat as per product usage guideline

Directions for Application

Apply 2-3 coats of topcoat keeping an interval of 4-6 hours between each coat.

Special Note

Before painting, the following things should be checked thoroughly:

- ▶ Ideal moisture content of the wall should be below 12%
- ▶ Ideal pH value of the wall surface should be between 7-11

Points to Note

- ▶ Shake well before use and do not over dilute or over extend brush
- ▶ Stir and strain the material through a fine sieve before use
- ▶ Do not apply on high alkaline surface
- ▶ Do not apply paint on a wet surface
- ▶ Do not apply paint on chalking or flaking surface or where the surface is infected with fungus / algae
- ▶ Do not apply paint if the ambient temperature is less than or expected to fall below 10° C
- ▶ Keep out of reach of children and away from foodstuff
- ▶ In case of contact with eyes, wash immediately with water and seek medical help

Version No: BPP1/04/2021. Please note that this data sheet supersedes all previous versions.

BERGER PAINTS INDIA LIMITED

Berger House, 129 Park Street, Kolkata 700 017 | CONSUMER RELATIONS MANAGER Ph: 1800-103-6030
 Fax: 91-33-2249-9729/9009 | SMS BERGER to 56767 | Email: consumerfeedback@bergerindia.com | www.bergerpaints.com