



# NEROLAC

Colours that Care


## NEROLAC BEAUTY SHEEN INTERIOR EMULSION



### PRODUCT DESCRIPTION

Nerolac Beauty Sheen is a value for money emulsion with excellent sheen, finish, good coverage and durability.

### PERFORMANCE FEATURES & BENEFITS

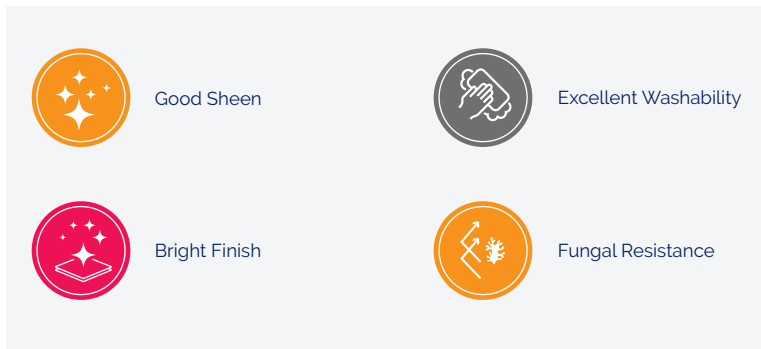

### SURFACE PREPARATION

1. Ensure the surface is clean, dry, free from all defective or poorly adhering material, dirt, grease, wax etc. Remove all loose or poorly adhering materials by rubbing down, using suitable abrasive paper and thereafter wipe off.
2. Treat fungus-affected area using Nerolac Fungicidal Solution. Allow it to react for 6-8 h.
3. Apply a coat of suitable Primer\*\* followed by Nerolac Wall Putty\*\*\* to level the dents & make the surface uniform. Sand the surface with emery paper no. 180 and wipe clean.
4. Again apply a coat of suitable primer\*\*. Sand the surface with emery paper no. 320 and wipe clean.
5. Then apply two to three coats of Nerolac Beauty Sheen Interior Emulsion.

### RECOMMENDED SYSTEM FOR APPLICATION

1. Primer\*\*(1 coat), Dry# in 4-6 h
2. Putty\*\*\*, Dry in 6-8 h
3. Primer\*\*(1 coat), Dry# in 4-6 h
4. Finish Nerolac Beauty Sheen Interior Emulsion (2-3 coats), Dry min. 4-6 h in between coats

Sand the surface with Emery paper and clean before application of subsequent coat.

\*\*Nerolac Premium Primer ( Water Thinnable / Solvent Thinnable ) or Nerolac Popular Primer ( Water Thinnable / Solvent Thinnable ).

\*\*\*Nerolac Wall putty or Nerolac Cement putty.

#Minimum 8 h for solvent thinnable primer & minimum 4-6 h for water Thinnable Primer.

For Repainting on Smooth Lime/Distemper/Emulsion/Enamel Masonry Surfaces skip steps 1 & 2 and start with step 3.

### PRECAUTIONS

1. Refer MSDS for "Nerolac Beauty Sheen Interior Emulsion" for safety measures & precautions.
2. Store in well ambient conditions, ventilated locations & away from sources of ignition and fire.
3. Keep away from children.
4. In case of eye / skin contact, wash with plenty of water.
5. Inhalation / Injection is dangerous. In either case, move to fresh air & consult a medical practitioner.
6. Do not apply when ambient temperature might drop to a level below 10°C within 4 h of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Do not use Universal stainers. Stir paint well before application.
10. The container must be tightly closed when not in use.
11. Do not pour the leftovers in the drain. Dispose off after natural drying.

## TECHNICAL DATA



\*\* Actual covering capacity may vary depending upon the method & condition of application, surface condition, temperature, wind velocity, application skills, surface roughness, surface porosity and shade.

## POST APPLICATION INSTRUCTIONS

For removing stains, sponge clean with mild soap solution and wipe clean. Please allow 2 weeks of drying time to freshly painted wall for it to be ready for stain removal/cleaning.



### SAFETY FEATURES

Non-Flammable



### PACK SIZE

1 L, 4 L, 10 L & 20 L



### SHADE RANGE

As per Nerolac Colour Scapes Fandeck & Shade Card



### SHELF LIFE & STORAGE

Shelf life is 24 months from the date of manufacturing in unopened condition. Store in a cool & dry place. Keep away from direct sunlight. Thinned paint to be consumed within 24 h after thinning

## DISCLAIMER

The product information and application details given by the company has been provided in good faith and is meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products. Therefore actual performance will depend on local factors prevailing at that point of time. Users are advised to carry-out sample tests by taking trials to ensure the suitability of products for their requirement prior to full-scale usage of our products.

The company is not liable for factors beyond its control such as application during adverse climatic conditions, use of improper application tools/techniques and surface preparation, any structural defects or the inferior quality of materials other than paints. The warranty/guarantee clauses shall accordingly be amended.