



NEROLAC

BEAUTY SILVER SILKY FINISH INTERIOR EMULSION



PRODUCT DESCRIPTION

Nerolac Beauty Silver is a high-quality water based, matt finish paint for beautifying and protecting interior walls. It is formulated by using an ideal combination of pigments and extenders, dispersed in a copolymer emulsion for smooth and pleasant matt finish.

PERFORMANCE FEATURES & BENEFITS



RECOMMENDED USAGE

Nerolac Beauty Silky Smooth Finish Interior Emulsion is recommended for interior wall surfaces such as ceilings, plasters, bricks, asbestos, etc.

RECOMMENDED SYSTEM FOR APPLICATION

For New Masonry Surfaces

- 1 Primer** (1 coat) Dry in 4 - 6 hrs.
- 2 Putty## Dry in 6 - 8 hrs.
- 3 Primer** (1 coat) Dry in 4 - 6 hrs.
- 4 Finish Nerolac Beauty Silky Smooth Finish Interior Emulsion (2-3 coats)
Dry min. 4-6 hrs. in between coats.

Sand the surface with Emery paper and wipe clean before application of subsequent coat.


**Nerolac Cement Primer (water thinnable / solvent thinnable) or Goody Universal Primer (Solvent thinnable) or Goody water thinnable Cement Primer

##Nerolac Wall Putty or Nerolac Cement Putty

#Minimum 8 hrs for Solvent Thinnable Primer & Minimum 4-6 hrs for Water Thinnable Primer

For Repainting on Smooth Lime / Distemper / Emulsion / Enamel Masonry Surfaces skip steps 1 and 2 and start with step 3

TECHNICAL DATA

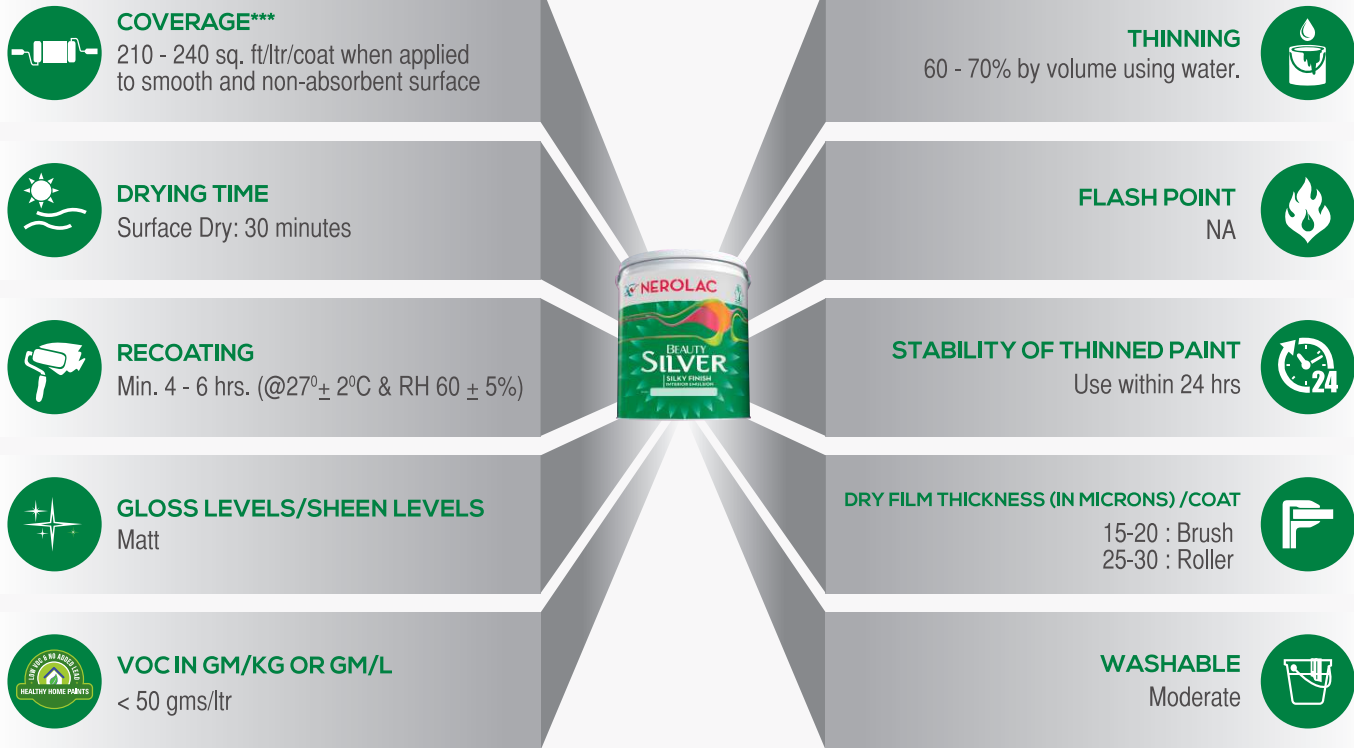

***Actual coverage may vary depending on Method, Condition of Application, Type of Tools, Surface Porosity & Shade. Use of Felt Roller may reduce coverage upto 50%.

PRECAUTIONS



1. Refer MSDS for "Nerolac Beauty Silky Smooth Finish" for safety measures & precautions.
2. Store in well-ambient conditions, ventilated locations & away from sources of ignition and fire.
3. Keep away from children.
4. In case of eye / skin contact, wash with plenty of water.
5. Inhalation / Injection dangerous. In either case, move to fresh air & consult medical practitioners.
6. Do not apply when ambient temperature might drop to levels below 10^oC within 4 hrs of application.
7. New plaster should be allowed to cure for minimum 12 weeks.
8. Avoid extra thinning for better results.
9. Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir the tinted paint well, after tinting & before application.
10. The container must be tightly closed when not in use. Stir well and strain before use.
11. Use safety equipments like rubber or polythene gloves, safety goggles / glasses & face mask.

POST APPLICATION INSTRUCTIONS

Surfaces painted with Nerolac Beauty Silver Silky Finish Interior Emulsion are washable by sponging with mild soap and water after a minimum of 2 weeks drying to remove ordinary stains and everyday dirt.

SAFETY FEATURES:

Non-Flammable.

PACK SIZES:

1 ltr, 4 ltrs, 10 ltrs, & 20 ltrs.

SHADE RANGE:

As per Beauty Range Shade Card & Colour Scapes Fandeck.

NO. OF SHADES POSSIBLE:

More Than 850

