




NEROLAC

NC SANDING SEALER

PRODUCT DESCRIPTION

Nerolac NC Sanding Sealer is a quick drying sealer, is easier to sanding and gives a smooth finish. Nerolac NC Sanding Sealer is recommended for filling the grains of wood prior to application of top coats such as Melmine, 1KPU Wood Finish

PERFORMANCE FEATURES & BENEFITS

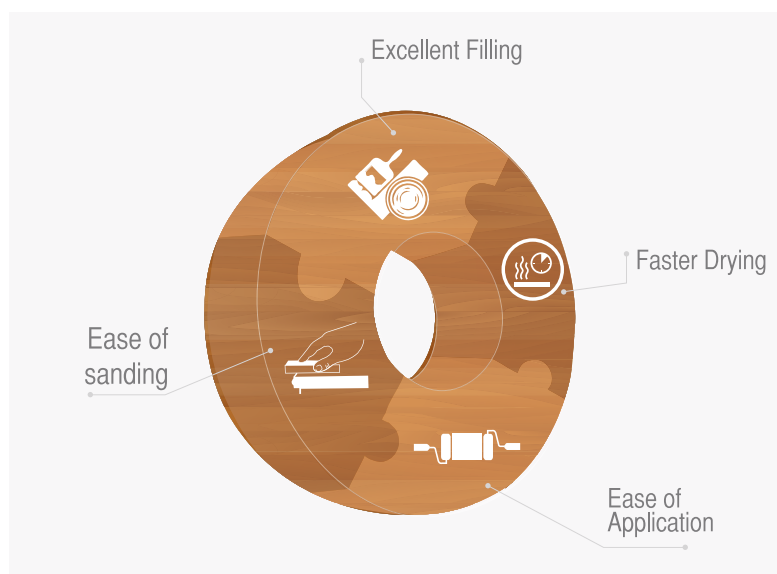

SURFACE PREPARATION

For New Wood

- 1 Sand the surface along the grains with emery paper no.180 followed by emery paper no. 320 or no. 400 wipe off loose dust particles

For Pre-polished wood

- 2 Remove all existing coatings by sanding or scraping & follow the same procedure as mentioned for new wood above.

DIRECTION FOR USE

Apply Nerolac NC Wood Sealer with muslin cloth or putty knife to fill the grains. Allow to dry for 3 - 4 hrs. Dry sand excess Sealer on surface with no. 180 emery paper. Repeat Sealer coats depending on the level of filling / perfection required.

- 1 Dilution of Sealer Nerolac NC Sanding Sealer application by cloth : 1 part sealer: 1 part Nerolac NC Thinner Spray application: 1 part sealer: 1.5 part Nerolac NC Thinner application by Putty Knife with appropriate proportion of Nerolac NC Thinner.

- 2 Repeat the sealer coat depending on the level of filling / perfection required. Sand the dried surface with emery paper no. 400.

- 3 The dry surface is now ready for applying a Nerolac Wonderwood 1 K PU Clear or Nerolac Wonderwood Melamine Finish.

TECHNICAL DATA



APPLICATION CONDITION

Relative humidity below 75%

WT. / 10 LTR

9.6 +/- 3% kg.



SANDING

Sanding with emery paper No 180 followed by 320 or 400 between application of each coat of sealer.

DRYING

Surface Dry : 2-3 mins.
Hard Dry : 3-4 hrs.



APPLICATION

By spraying / muslin cloth / putty knife



HEALTH AND SAFETY INFORMATION



Store Nerolac NC Sanding Sealer in a cool, dry place.
Keep container tightly closed, out of children's reach & away from food.
Keep the sealer away from sources of ignition.
Avoid inhalation of vapour by wearing a suitable nose pad during sanding & surface preparation.
Ensure good ventilation at all times, In case of contact with eyes, rinse with plenty of water and seek medical advice immediately.

STORAGE & HANDLING



Storage: Store in cool & dry place.

Disposal: Do not pour the leftover sealer down a drain. Seal & keep for disposal. Contains no added lead, mercury or chromium compounds.



Pack Size: 500 ml, 1 ltrs., 4 ltrs. and 20 ltrs.

SAFETY FEATURES:



Flammable.

